ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

POOLS ACCESSORIES - PORTUCALE

units: mm

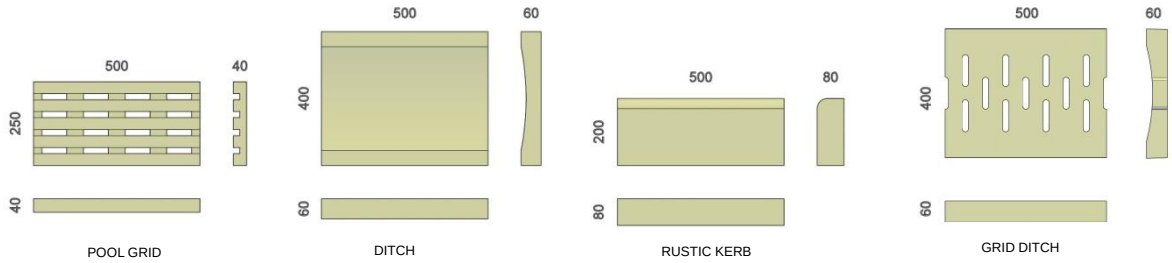



Photo and Dimensions of the Piece



Product characteristics and package				
Colors Available	00	10	20	30	40
Product	POOL GRID	DITCH	RUSTIC KERB	GRID DITCH
Quantity per Pallet	32 lm	24 lm	-	24 lm
Quantity per lm	2 units	2 units	2 units	2 units
Items/Pallet	64 units	48 units	-	48 units
Average weight/Items	± 9 kg	± 25 kg	± 18 kg	± 20 kg
Average weight/lm	± 18 kg	± 50 kg	± 36 kg	± 40 kg
Average weight/Pallet	±600 kg	±1200kg	-	±960kg

Technical Specifications		
EN 1339 – "Concrete paving flags – Requirements and test methods"		
Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved: Vítor Silva	**Elaborate:** Bruno Veloso	**PTDS nº:** ACES_PORT_EN	**Date:** 19-03-2020

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão – 4761-926 V.N. Famalicão, Portugal

www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.