ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET

CE

ARDÓSIA HAMMERED – Mod. GR 635

units: mm

Dimensions

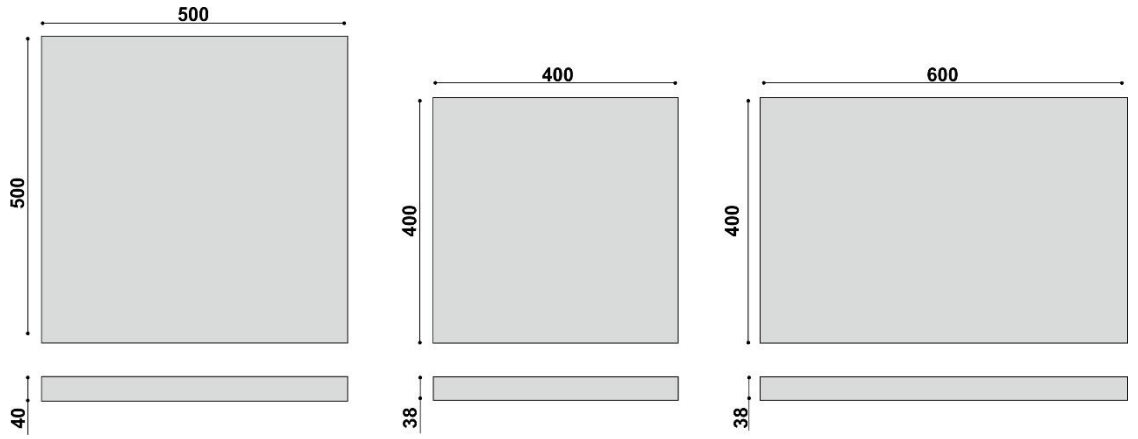

Available colors



GR 635/2



GR 635/4

Product characteristics and package			
Dimensions (length x width x thickness)	500 x 500 x 40	400x400x38	600x400x38
Items/Pallet	96 units	150 units	100 units
Items/Sqm	4 units	6,25 units	4,17 units
Sqm/Items	0,25 sqm	0,16 m²	0,24 m²
Sqm/Pallet	24 sqm	24 m²	24 m²
Average weight/sqm	± 83,2 kg	± 75 kg	± 81,12kg
Average weight/Items	± 20,8 kg	± 12 kg	± 19,5 kg
Average weight/Pallet	± 1996,8 kg	± 1800 kg	± 1950 kg

Technical Specifications		
EN 1339 – "Concrete paving flags – Requirements and test methods"		
Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved Vitor Silva	**Elaborate** Joana Ferreira	**PTDS nº:** IARD_004_EN	**Date:** 26/04/2021

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão – 4761-926 V.N. Famalicão, Portugal

www.aclweb.pt

acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.