ACIMENTEIRADOLOURO

CE

Product Technical Data Sheet

Betão Aparente Hammered



← Betão Aparente Mod. GR 130




Steps: Available in all models

Thermal insulation: Available in all models

Types of Application: Floors and facades


Product dimensions

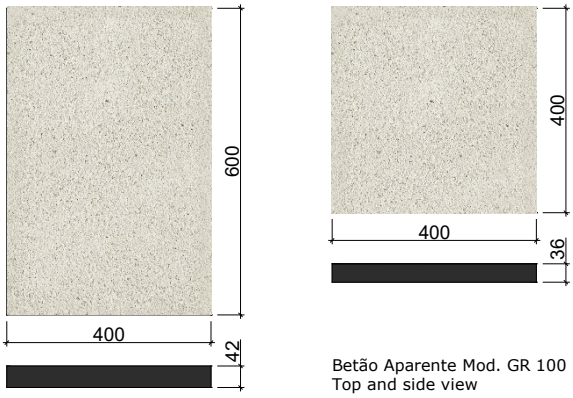

Betão Aparente Mod. GR 100
Top and side view

Dimensions (mm)

Available colors

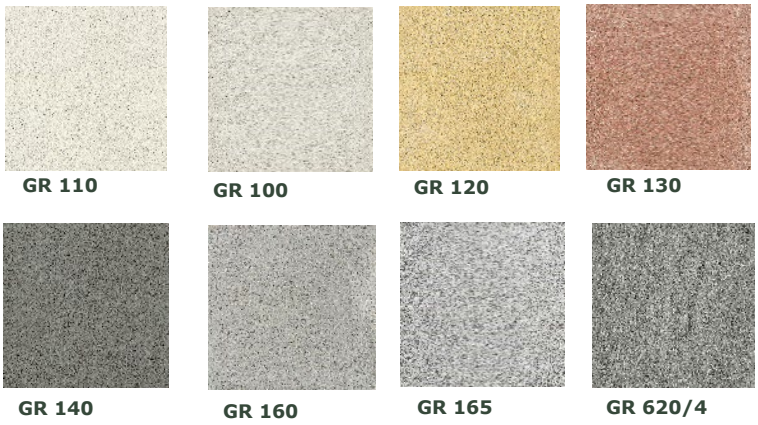

EN 1339 – "Concrete paving flags – Requirements and test methods"

Product Characteristics

Dimensions	400 x 400 x 36	600 x 400 x 42
Average weight/sqm	± 80 kg	± 95 kg
sqm/Pallet	26,88 sqm	22,08 sqm
Items/sqm	6,25 un.	4,16 un.
Items/Pallet	168 un.	92 un.
sqm/Item	0,16 sqm	0,24 sqm
Average weight/Item	± 12,8 kg	± 22,8 kg
Average weight/Pallet	± 2150 kg	± 2098 kg

Technical Specifications

Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Approved	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Class A1	Not Relevant

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Approved	**Elaborated**	**Ref.ª FTP**	**Date**
Vítor Silva	Joana Ferreira	BEAP_002_EN	15/01/2026