ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

RUSTIC CAPPING 750x300x40

Units: mm

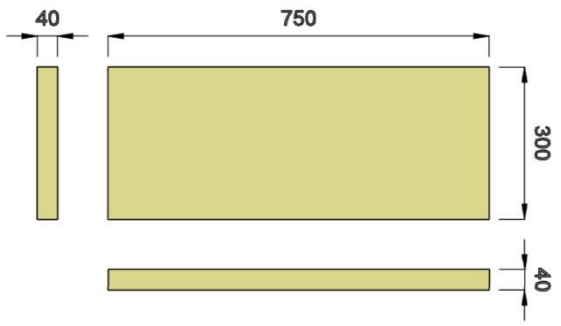




Photo and Dimensions of the Piece



Product characteristics and package		Technical Specifications	
		EN 1339 – "Concrete paving flags – Requirements and test methods"	
Colors Available (others colors on request)		**Intended use**	**Exterior Capping**
Dimensions	750x300x40	**Emission of asbestos**	Not Relevant
Quantity per Pallet	36 lm	**Breaking Strength (MPa)**	≥ 3,5
Items/lm	1,3 units	**Compressive Strength (MPa)**	≥ 45 (C35/45)
Items/Pallet	48 units	**Thermal Conductivity [W/(mk)]**	Not Relevant
Average weight/Items	± 14,5 kg	**External fire performance**	Not Relevant
Average weight/lm	± 19,3 kg	**Durability**	Satisfactory
Average weight/Pallet	± 696 kg	**Reaction to fire**	Not Relevant
Approved: Vítor Silva	**Elaborate:** Bruno Veloso	**PTDS nº:** CAPR_001_EN	**Date:** 05-08-2016

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão – 4761-926 V.N. Famalicão, Portugal

www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.