ACL ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

CAPPINGS 500x325x40 | 500x460x40

Units: mm

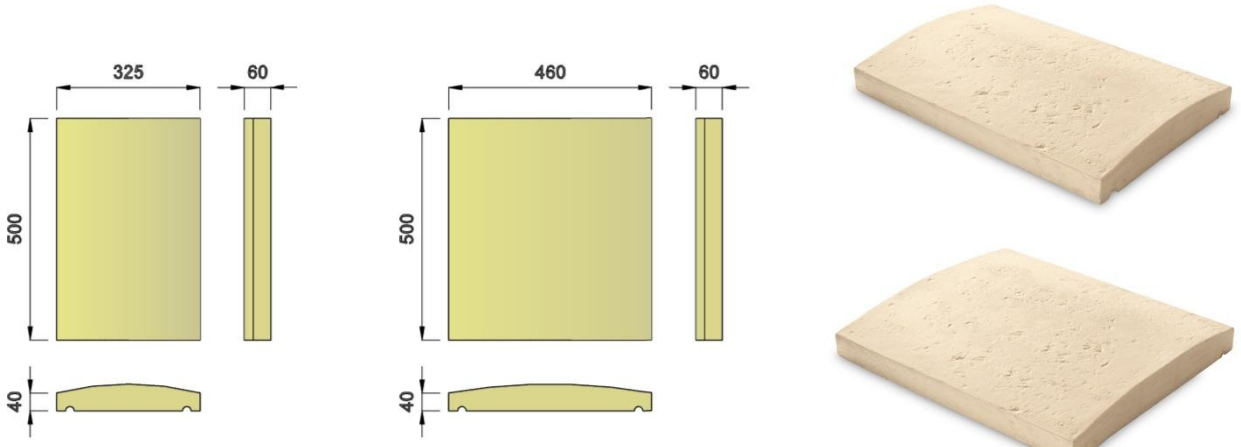


Photo and Dimensions of the Piece



Product characteristics and package			Technical Specifications	
			EN 1339 – "Concrete paving flags – Requirements and test methods"	
Colors Available (others colors on request)			**Intended use**	**Exterior Capping**
Dimensions	500x325x40	500x460x40	**Emission of asbestos**	Not Relevant
Quantity per Pallet	27 lm	20 lm	**Breaking Strength (MPa)**	≥ 3,5
Items/lm	2 units	2 units	**Compressive Strength (MPa)**	≥ 45 (C35/45)
Items/Pallet	54 units	40 units	**Thermal Conductivity [W/(mk)]**	Not Relevant
Average weight/Items	± 19 kg	± 26 kg	**External fire performance**	Not Relevant
Average weight/lm	± 38 kg	± 52 kg	**Durability**	Satisfactory
Average weight/Pallet	± 1026 kg	± 1040 kg	**Reaction to fire**	Not Relevant
Approved: Vítor Silva	**Elaborate:** Bruno Veloso		**PTDS nº:** CAPM_001_EN	**Date:** 05-08-2016

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão – 4761-926 V.N. Famalicão, Portugal

www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.