ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET CE


INTERLOCK ECO QUADRADO 200x200x80 (Length x Width x Height)

Approximate Permeable Area: 6,25%

Unit: mm

Top View

Faceted edges:

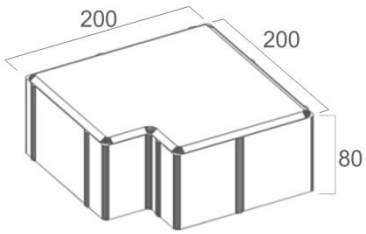

Top View

Sharp edges:

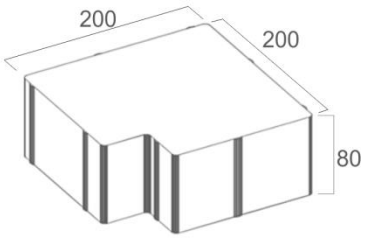


Photo of the piece



Available Colours:



Yellow



Red



White



Grey



Anthracite

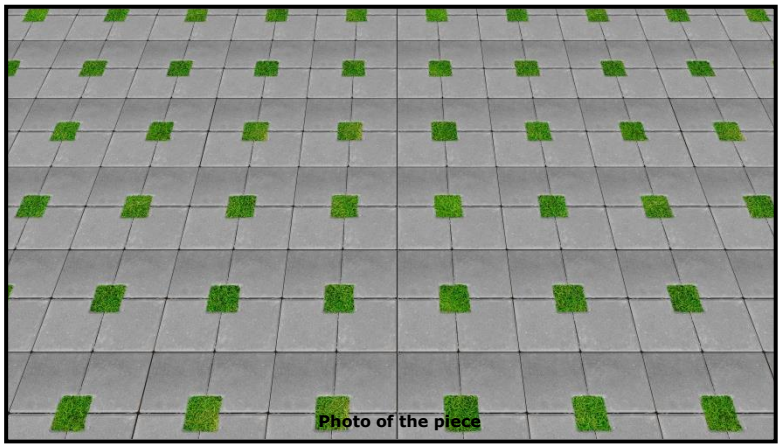


Photo of the piece

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Product Characteristics

EN 1338 – "Concrete paving Blocks – Requirements and test methods"

Intended use	Internal Flooring	External Flooring
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,6	≥ 3,6
Slip/Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved by: Dinis Silva	**Elaborated by:** Bruno Veloso	**PTDS nº:** PAV_EQ_012_EN	**Date:** 04/07/2018