ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

KIT POOLS - SAHARA (MOD. 400 r1500)

Units: mm

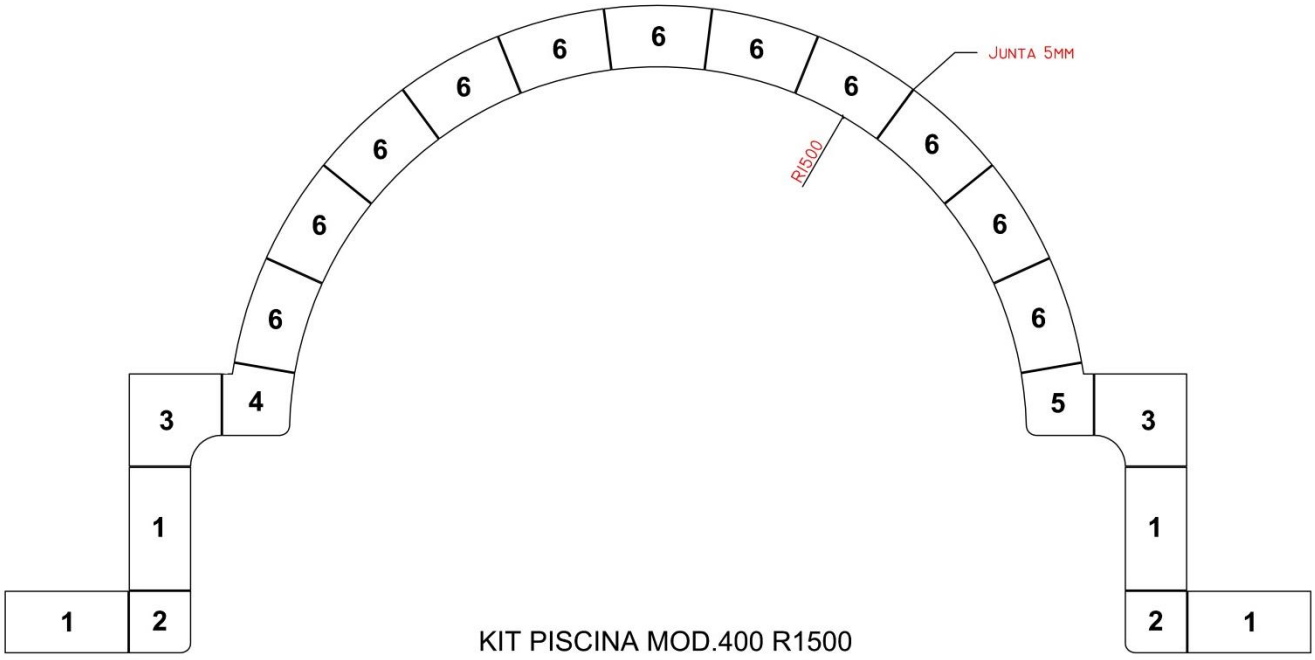

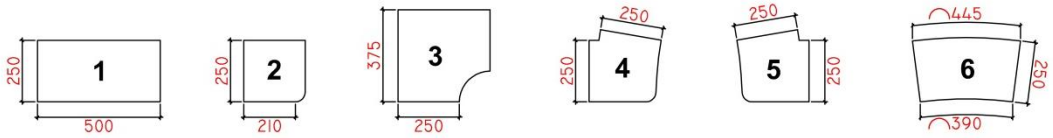

BORDER | EXT. CORNER | R15 INT. CORNER | CURVED CORNER(left) | CURVED CORNER(right) | CURVED BORDER

Assembly scheme

Product characteristics and package

Colors Available: 00, 10, 20, 30, 40

Ref.ª	KIT POOLS	DIMENSIONS Thickness 30/50	AVERAGE WEIGHT
1	BORDER	500 x 250	11,6 kg
2	EXT. CORNER	250 x 250	8,6 kg
3	R15 INT. CORNER	375 x 375	12 kg
4	CURVED CORNER (left)	250 x 250	10 kg
5	CURVED CORNER (right)	250 x 250	10 kg
6	CURVED BORDER	445/390 x 250	11,8 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use	Internal Flooring	External Flooring
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Bruno Veloso	KITP_400R1.5_EN	23-12-2016

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.