
ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

Marmocim Hammered

units: mm

Photo and Dimensions of the Piece

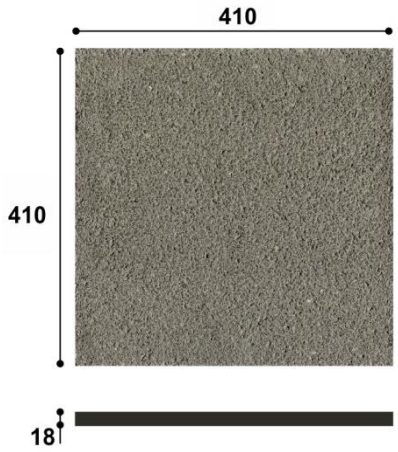



Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



GR 408 Cream | GR 425 Beige | GR 403 Grey | GR 430 Spice | GR 436 Snack | GR 432 Precious | GR 415 Earth | GR 422 Grass

GR 417 Rock | GR 423 Cave | GR 413 Volcanic | GR 426 Salt | GR 433 Chic | GR 405 Black | GR 427 Shadow | GR 434 Desert

GR 428 Brick | GR 401 Lava | GR 429 Hill | GR 424 Gem | GR 411 Red | GR 410 Yellow | GR 421 Forest

Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	Satisfactory	Satisfactory
	DIN 51130	R13	R13
	DIN 51097	Class C	Class C
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_002_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.