
ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET CE


Marmocim Polished

units: mm

Photo and Dimensions of the Piece

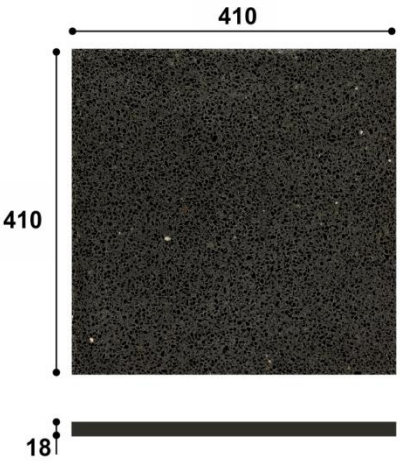



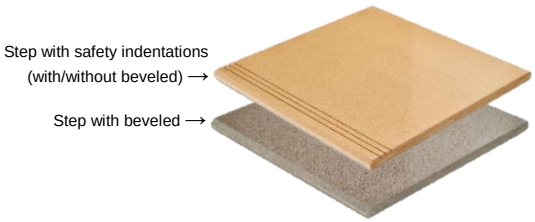

Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18	200 x 200 x 18
Items/Pallet	178 units	750 units
Items/sqm	5,95 units	25 units
sqm/Item	0,168 sqm	0,04 sqm
sqm/Pallet	30 sqm	30 sqm
Average weight/sqm	42 kg	42 kg
Average weight/Item	7,3 kg	1,68 kg
Average weight/Pallet	1300 kg	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	USRV ≥ 30	USRV ≥ 30
	DIN 51097	Class A	Class A
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_001_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.


ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

Marmocim Hammered

units: mm

Photo and Dimensions of the Piece

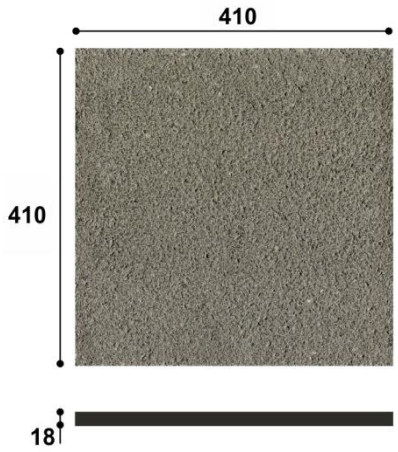



Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



GR 408 Cream | GR 425 Beige | GR 403 Grey | GR 430 Spice | GR 436 Snack | GR 432 Precious | GR 415 Earth | GR 422 Grass

GR 417 Rock | GR 423 Cave | GR 413 Volcanic | GR 426 Salt | GR 433 Chic | GR 405 Black | GR 427 Shadow | GR 434 Desert

GR 428 Brick | GR 401 Lava | GR 429 Hill | GR 424 Gem | GR 411 Red | GR 410 Yellow | GR 421 Forest

Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	Satisfactory	Satisfactory
	DIN 51130	R13	R13
	DIN 51097	Class C	Class C
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_002_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET


CE

Marmocim Anti-skid

units: mm

Photo and Dimensions of the Piece

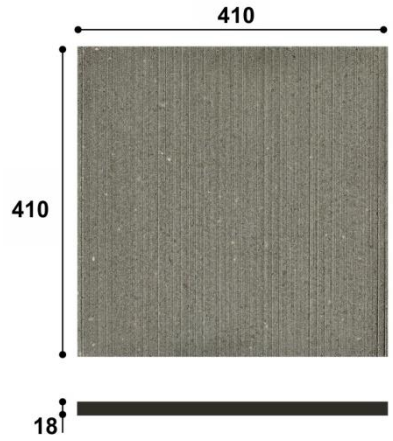

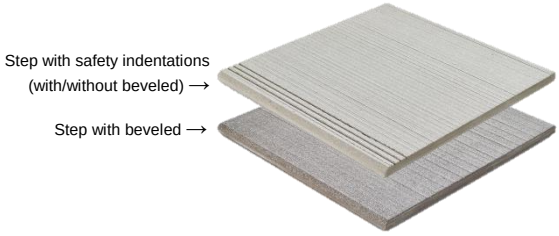

Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use		**Internal Flooring**	**External Flooring**
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	Satisfactory	Satisfactory
	DIN 51130	R13	R13
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	**Elaborate:**	**PTDS nº:**	**Date:**
Vítor Silva	Joana Ferreira	MARM_003_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.


ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET

Marmocim Honed (POLISHED WITHOUT SHINE)

units: mm

Photo and Dimensions of the Piece

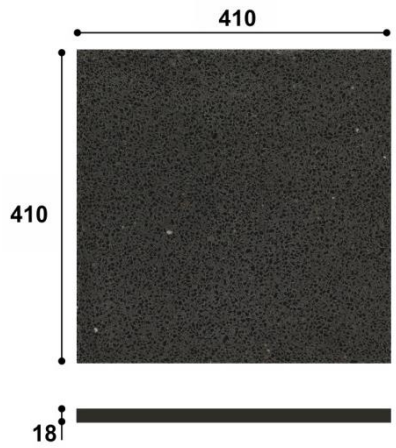

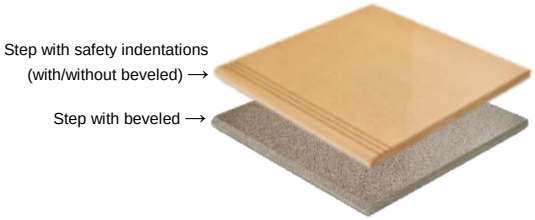

Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



M 408 Cream | M 425 Beige | M 403 Grey | M 430 Spice | M 436 Snack | M 432 Precious | M 415 Earth | M 422 Grass

M 417 Rock | M 423 Cave | M 413 Volcanic | M 426 Salt | M 433 Chic | M 405 Black | M 427 Shadow | M 434 Desert

M 428 Brick | M 401 Lava | M 429 Hill | M 424 Gem | M 411 Red | M 410 Yellow | M 421 Forest

Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	USRV ≥ 30	USRV ≥ 30
	DIN 51097	Class A	Class A
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_004_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET


CE

Marmocim Natural

units: mm

Photo and Dimensions of the Piece

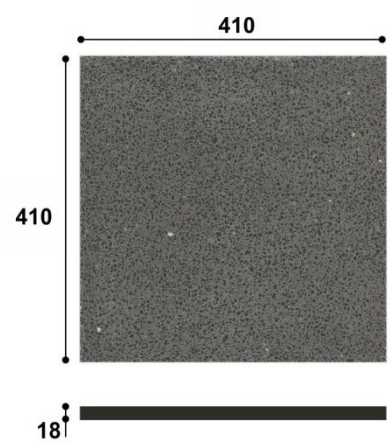

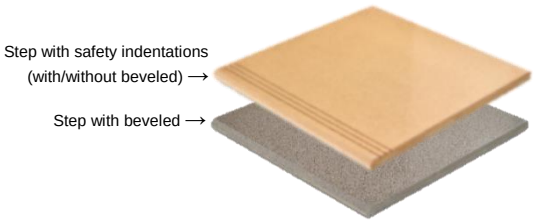

Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



N 408 Cream | N 425 Beige | N 403 Grey | N 430 Spice | N 436 Snack | N 432 Precious | N 415 Earth | N 422 Grass

N 417 Rock | N 423 Cave | N 413 Volcanic | N 426 Salt | N 433 Chic | N 405 Black | N 427 Shadow | N 434 Desert

N 428 Brick | N 401 Lava | N 429 Hill | N 424 Gem | N 411 Red | N 410 Yellow | N 421 Forest

Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	Satisfactory	Satisfactory
	DIN 51130	R10	R10
	DIN 51097	Class A	Class A
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_005_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.