ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET

CE

Marmocim Revolution - Hammered


units: mm

Photo and Dimensions of the Piece

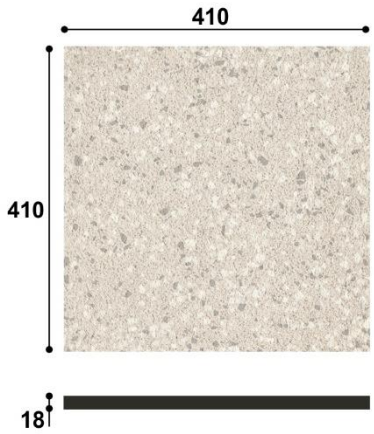



Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades

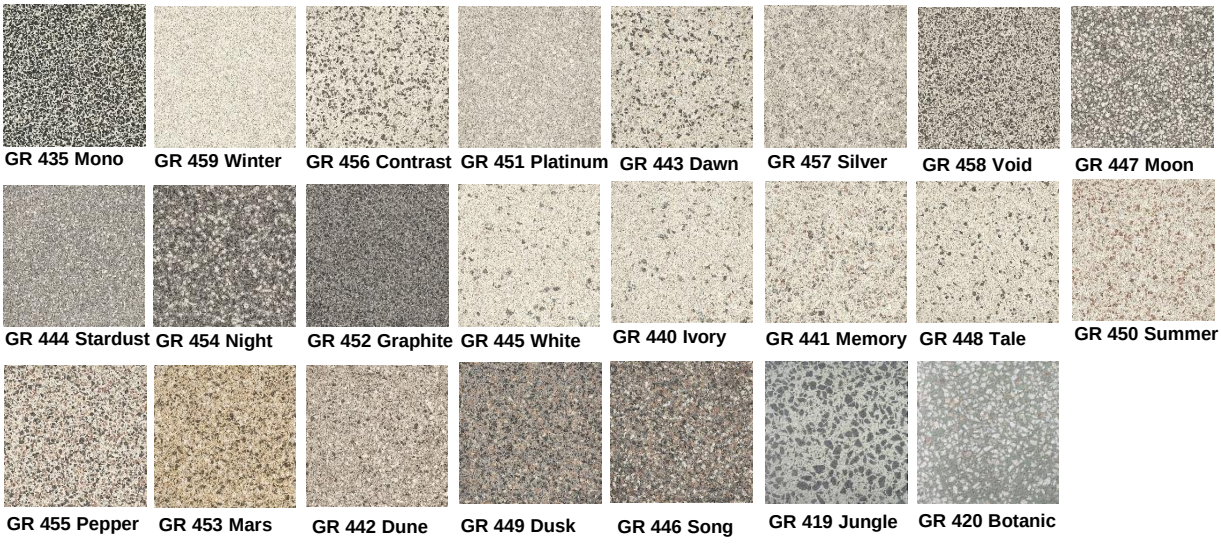

GR 435 Mono | GR 459 Winter | GR 456 Contrast | GR 451 Platinum | GR 443 Dawn | GR 457 Silver | GR 458 Void | GR 447 Moon

GR 444 Stardust | GR 454 Night | GR 452 Graphite | GR 445 White | GR 440 Ivory | GR 441 Memory | GR 448 Tale | GR 450 Summer

GR 455 Pepper | GR 453 Mars | GR 442 Dune | GR 449 Dusk | GR 446 Song | GR 419 Jungle | GR 420 Botanic

Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18
Items/Pallet	178 units
Items/sqm	5,95 units
sqm/Item	0,168 sqm
sqm/Pallet	30 sqm
Average weight/sqm	42 kg
Average weight/Item	7,3 kg
Average weight/Pallet	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	Satisfactory	Satisfactory
	DIN 51130	R13	R13
	DIN 51097	Class C	Class C
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_007_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.