ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET


CE


Marmocim Revolution - Polished

units: mm

Photo and Dimensions of the Piece

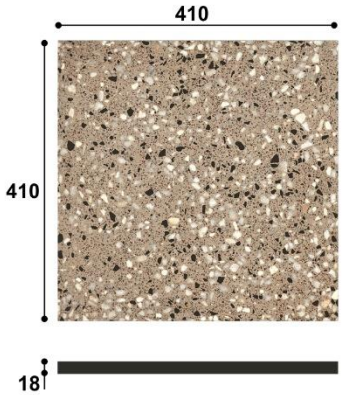



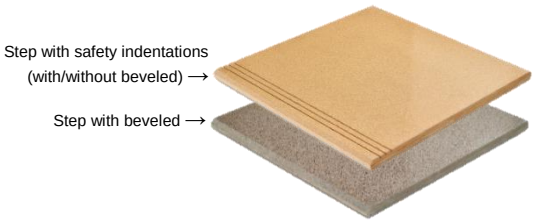

Step: Available in all models
Skirting: Available in all models
Application: Floorings and Facades



Product Features and Palletization

Dimensions (Length x width x thickness)	410 x 410 x 18	200 x 200 x 18
Items/Pallet	178 units	750 units
Items/sqm	5,95 units	25 units
sqm/Item	0,168 sqm	0,04 sqm
sqm/Pallet	30 sqm	30 sqm
Average weight/sqm	±42 kg	±42 kg
Average weight/Item	±7,3 kg	±1,75 kg
Average weight/Pallet	±1300 kg	±1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

		Internal Flooring	External Flooring
Intended use			
Emission of asbestos		Approved	Not Relevant
Breaking Strength (MPa)		≥ 5	≥ 5
Slip/ Skid Resistance	**EN 1339**	USRV ≥ 30	USRV ≥ 30
	DIN 51097	Class A	Class A
Thermal Conductivity [W/(mk)]		1,24	Not Relevant
External fire performance		Not Relevant	Not Relevant
Durability		Satisfactory	Satisfactory
Reaction to fire		Class A1	Not Relevant

Approved:	Elaborate:	PTDS nº:	Date:
Vítor Silva	Joana Ferreira	MARM_006_EN	22-04-2025

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.