ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET CE

INCONCRETE SMOOTH FLOORING (MOD. 950)

Units: mm

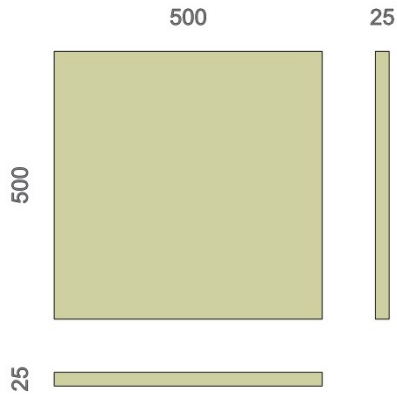




Photo and Dimensions of the Piece

Available Colors

950/00

950/10


950/20



950/30



950/40

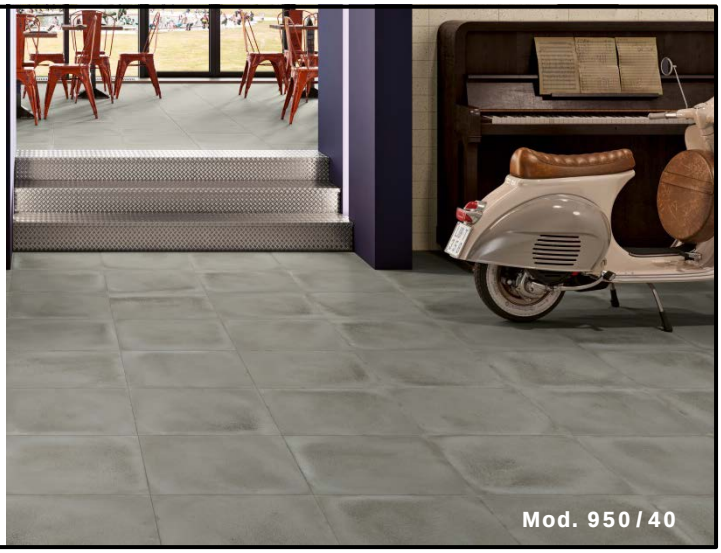

Product characteristics and package

Dimensions	500 x 500 x 25
Quantity per Pallet	20 sqm
Quantity per sqm	4 units
Items/Pallet	80 units
Average weight/Items	13,75 kg
Average weight/sqm	55 kg
Average weight/Pallet	1106 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use	Internal Flooring	External Flooring
Emission of asbestos	Approved	Approved
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Classe A1

Approved	Elaborate	PTDS nº:	Date
Vítor Silva	Bruno Veloso	PAV_950_EN	17-07-2020

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.