ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

CE

INCONCRETE HAMMERED FLOORING (MOD. GR 950)

Units: mm

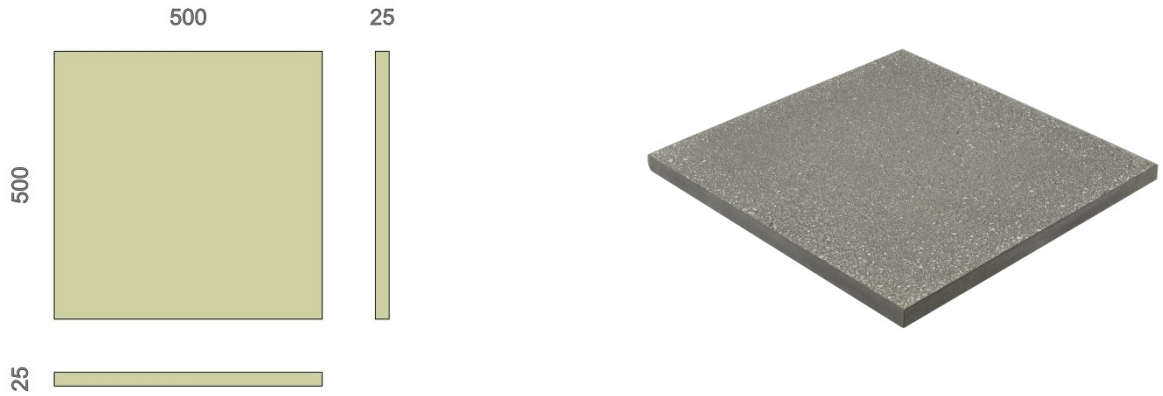


Photo and Dimensions of the Piece

Available Colors



GR 950/00 | GR 950/10 | GR 950/20 | GR 950/30 | GR 950/40

Product characteristics and package		Technical Specifications		
		EN 1339 – "Concrete paving flags – Requirements and test methods"		
		Intended use	**Internal Flooring**	**External Flooring**
Dimensions	500 x 500 x 25	**Emission of asbestos**	Approved	Approved
Quantity per Pallet	20 sqm	**Breaking Strength (MPa)**	≥ 3,5	≥ 3,5
Quantity per sqm	4 units	**Slip/ Skid Resistance**	Satisfactory	Satisfactory
Items/Pallet	80 units	**Thermal Conductivity [W/(mk)]**	1,24	Not Relevant
Average weight/Items	13,75 kg	**External fire performance**	Not Relevant	Not Relevant
Average weight/sqm	55 kg	**Durability**	Satisfactory	Satisfactory
Average weight/Pallet	1106 kg	**Reaction to fire**	Classe A1	Classe A1
Approved Vítor Silva	**Elaborate** Bruno Veloso	**PTDS nº:** PAV_GR950_EN	**Date** 17-07-2020	

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.