ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

SAHARA FLOORING (MOD. 400)

Units: mm

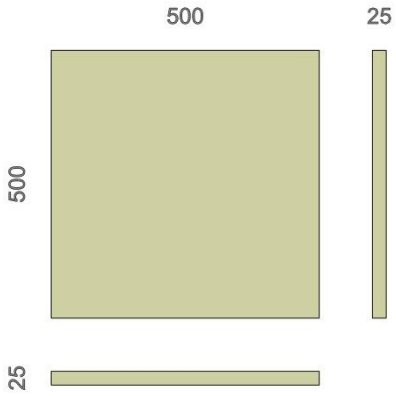

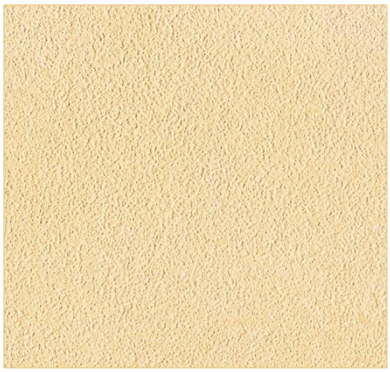

Photo and Dimensions of the Piece



Mod. 400 / 00



Mod. 400 / 10



Mod. 400 / 20



Mod. 400 / 30



Mod. 400 / 40

Product characteristics and package	
Colors Available	00 10 20 30 40
Dimensions	500 x 500 x 25
Quantity per Pallet	20 sqm
Quantity per sqm	4 units
Items/Pallet	80 units
Average weight/Items	14 kg
Average weight/sqm	56 kg
Average weight/Pallet	1120 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use	Internal Flooring	External Flooring
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved	Elaborate	PTDS nº:	Date
Vítor Silva	Bruno Veloso	PAV_400_EN	10-08-2016

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal

www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.