ACIMENTEIRADOLOURO


Product Technical Data Sheet

Portucale – 3 Formats

MOD. 730

Product dimensions

Dimensions (mm)

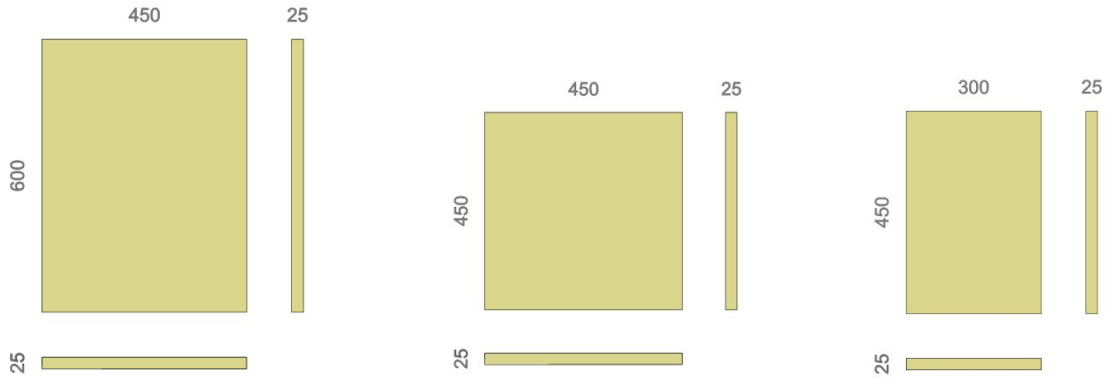



Available colors


730/10


730/00


730/20


730/30


730/40

EN 1339 – "Concrete paving flags – Requirements and test methods"

Product Characteristics

Dimensions	600 x 450 | 450 x 450 | 450 x 300 (Thickness 25)	
Quantity per Pallet	17,92 sqm	
Quantity per Module	1,28 sqm	
Module/Pallet	**14 modules**	
	1 module	3 units – 600x450x25
		1 unit – 450x450x25
		2 units – 450x300x25
Average weight/sqm	± 56 kg	
Average weight/Pallet	± 1004 kg	

Technical Specifications

Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Approved	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Class A1	Not Relevant

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Approved	**Elaborated**	**Ref.ª FTP**	**Date**
Vítor Silva	Joana Ferreira	PORT3_001_EN	18/02/2026