ACIMENTEIRADOLOURO

CE


Product Technical Data Sheet


Portucale – 6 Formats

MOD. 760

Product dimensions

Dimensions (mm)

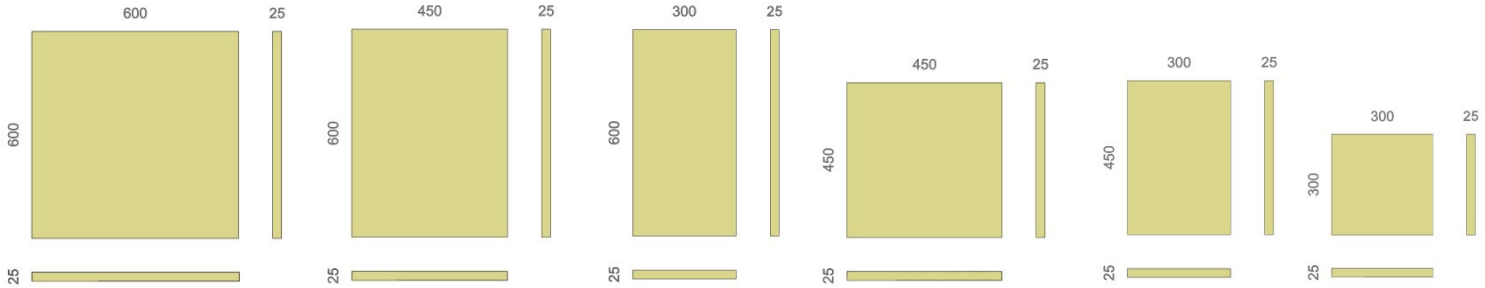

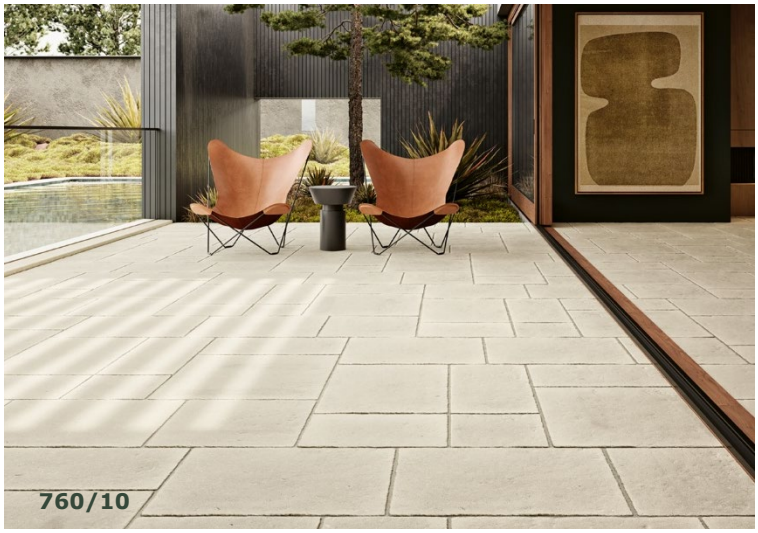

Available colors



760/10



760/00



760/20



760/30



760/40

EN 1339 – "Concrete paving flags – Requirements and test methods"

Características do Produto

Dimensions	600 x 600 600 x 450 | 600 x 300 450 x 450 | 450 x 300 | 300 x 300 (Thickness 25)	
Quantity per Pallet	19,60 sqm	
Quantity per Module	1,96 sqm	
Module/Pallet	**10 modules**	
	1 module	1 unit - 600x600x25
		3 units - 600x450x25
		1 unit - 450x450x25
		1 unit - 450x300x25
		2 units - 600x300x25
		1 units - 300x300x25
Average weight/sqm	± 56 kg	
Average weight/Pallet	± 1098 kg	

Technical Specifications

Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Approved	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Class A1	Not Relevant

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Approved	**Elaborated**	**Ref.ª FTP**	**Date**
Vítor Silva	Joana Ferreira	PORT6_001_EN	18/02/2026