
ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET CE

RELEVO HAMMERED MOD.GR70


units: mm

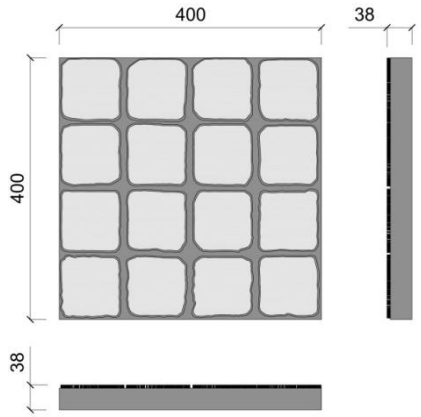

Piece Dimensions



Mod. GR 70/0



Mod. GR 70/5

Piece Photo



Product characteristics and package		Technical Specifications		
		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Dimensions	400 x 400 x 38	**Intended use**	**Internal Flooring**	**External Flooring**
Quantity per Pallet	24,96 sqm	**Emission of asbestos**	Pass	Not Relevant
Sqm/Item	0,16 sqm	**Breaking Strength (MPa)**	≥ 3,5	≥ 3,5
Items/Sqm	6,25 units	**Slip/ Skid Resistance**	Satisfactory	Satisfactory
Items/Pallet	156 units	**Thermal Conductivity [W/(mk)]**	1,24	Not Relevant
Average weight/Item	12 kg	**External fire performance**	Not Relevant	Not Relevant
Average weight/sqm	75 kg	**Durability**	Satisfactory	Satisfactory
Average weight/Pallet	1870 kg	**Reaction to fire**	Classe A1	Not Relevant
Approved Vítor Silva	**Elaborate** Bruno Veloso	**PTDS nº:** RELB_070_EN	**Date** 21-09-2016	

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.