ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

RELEVO NORMAL MOD. 62

Units: mm



Top View



Side View

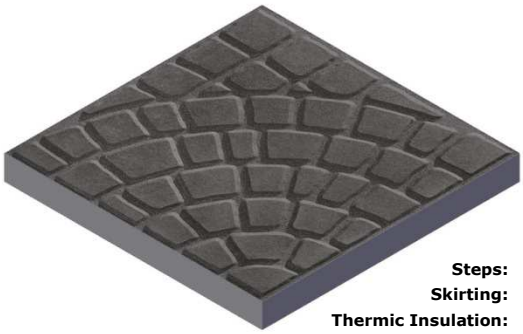

Steps: Not available
Skirting: Not available
Thermic Insulation: Not available
Types of Application: Pavements



MOD. 62/0



MOD. 62/5

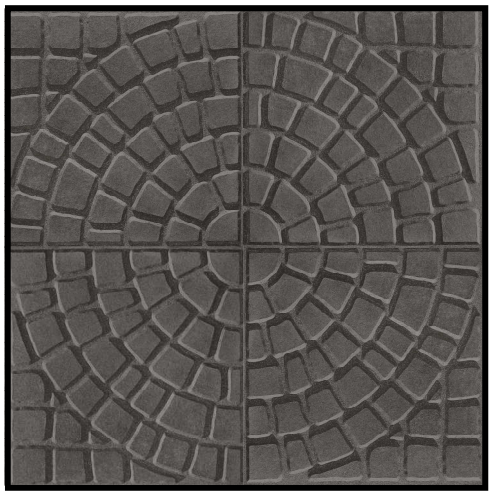

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone

Product Characteristics

EN 1339 – "Concrete paving flags – Requirements and test methods"

Measures	400x400x38	Intended use	Internal Flooring	External Flooring
Average weight / m²	81,25 kg	Emission of asbestos	Pass	Not Relevant
m² / Pallet	24,96 m²	Breaking Strength (MPa)	≥3,5	≥ 3,5
Items / m²	6,25 items.	Slip/ Skid Resistance	Satisfactory	Satisfactory
Items / Pallet	156 items.	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
m² / Item	0,16 m²	External fire performance	Not Relevant	Not Relevant
Average weight / Item	13 kg	Durability	Satisfactory	Satisfactory
Average weight / Pallet	2028 kg	Reaction to fire	Classe A1	Not Relevant

Approved:	FTP nº:	Date:
Vítor Silva	RELN_001_EN	14/01/2013

A Cimenteira do Louro, S.A. | Ap. 163 E.C.Famalicão – 4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900 | www.acimenteiralouro.pt
acl@acimenteiralouro.pt

ACL ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET CE

RELEVO NORMAL MOD. 63

Units: mm



Top View



Side View

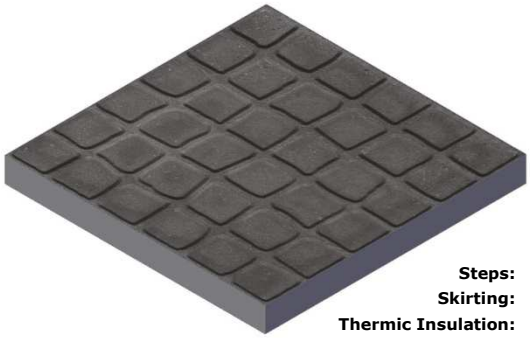

Steps: Not Available
Skirting: Not Available
Thermic Insulation: Not Available
Types of Application: Pavements



MOD. 63/0



MOD. 63/5

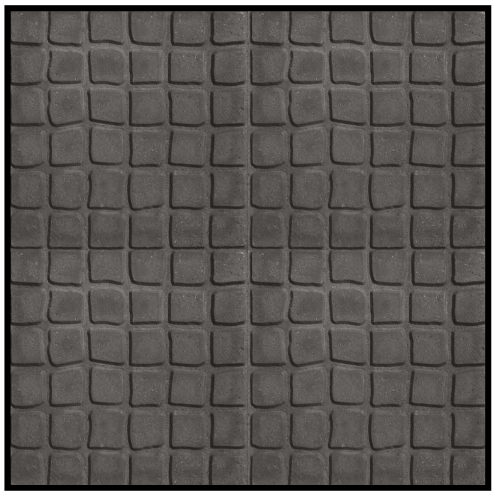

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone

Product Characteristics

EN 1339 – "Concrete paving flags – Requirements and test methods"

Measures	*400x400x38*	*Intended Use*	*Internal Flooring*	*Pavimento Exterior*
Average weight / m²	*81,25 kg*	*Emission of asbestos*	*Pass*	*Not Relevant*
m² / Pallet	*24,96 m²*	*Breaking Strenght(MPa)*	*≥3,5*	*≥ 3,5*
Items / m²	*6,25 items.*	*Slip/Skid Resistance*	*Satisfactory*	*Satisfactory*
Items / Pallet	*156 items.*	*Thermal Conductivity [W/(mk)]*	*1,24*	*Not Relevant*
m² / Item	*0,16 m²*	*External fire performance*	*Not Relevant*	*Not Relevant*
Average weight / Item	*13 kg*	*Durability*	*Satisfactory*	*Satisfactory*
Average weight / Pallet	*2028 kg*	*Reaction to fire*	*Classe A1*	*Not Relevant*

Approved:	*FTP nº:*	*Date:*
Vítor Silva	RELN_002_EN	14/01/2013

A Cimenteira do Louro, S.A. | Ap. 163 E.C.Famalicão – 4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900 | www.acimenteiralouro.pt
acl@acimenteiralouro.pt

ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

RELEVO NORMAL MOD. 70/0

Units: mm



Top View



Side View



Steps: Not available
Skirting: Not available
Thermal Insulation: Not available
Types of Application: Pavements

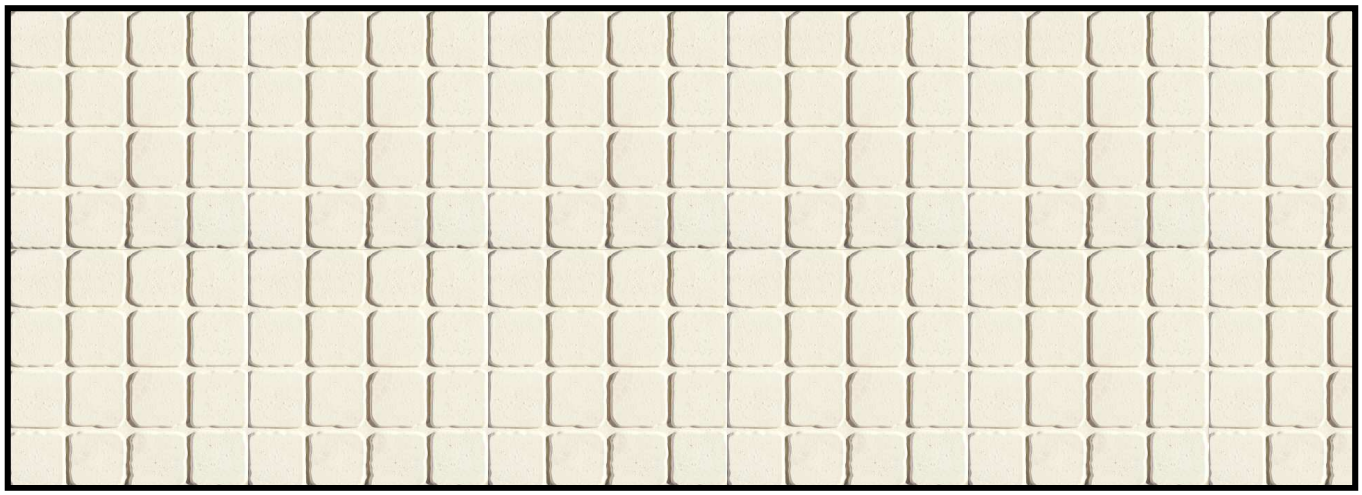

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone

Product Characteristics

EN 1339 – "Concrete paving flags – Requirements and test methods"

Measures	400x400x38	Intended Use	Internal Flooring	External Flooring
Average weight / m²	81,25 kg	Emission of asbestos	Pass	Not Relevant
m² / Pallet	24,96 m²	Breaking Strenght(MPa)	≥3,5	≥ 3,5
Items / m²	6,25 items.	Slip / Skid Resistance	Satisfactory	Satisfactory
Items / Pallet	156 items.	Thermal conductivity [W/(mk)]	1,24	Not Relevant
m² / Item	0,16 m²	External Fire performance	Not Relevant	Not Relevant
Average weight / Item	13 kg	Durability	Satisfactory	Satisfactory o
Average weight / Pallet	2028 kg	Reaction to fire	Classe A1	Not Relevant

Approved:	FTP nº:	Date:
Vítor Silva	RELN_003_EN	14/01/2013

A Cimenteira do Louro, S.A. | Ap. 163 E.C.Famalicão – 4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900 | www.acimenteiralouro.pt
acl@acimenteiralouro.pt

ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

CE

RELEVO NORMAL MOD. 71/0

Units: mm

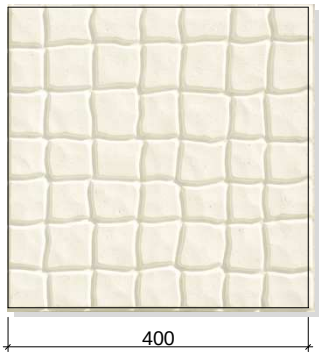

Top View



Side View



Steps: Not available
Skirting: Not available
Thermal Insulation: Not available
Types of Application: Pavements



Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone

Product Characteristics

EN 1339 – "Concrete paving flags – Requirements and test methods"

Measures	400x400x38	Intended Use	Internal Flooring	External Flooring
Average weight / m²	81,25 kg	Emission of asbestos	Pass	Not Relevant
m² / Pallet	24,96 m²	Breaking Strenght(MPa)	≥3,5	≥ 3,5
Items / m²	6,25 items.	Slip / Skid Resistance	Satisfactory	Satisfactory
Items / Pallet	156 items.	Thermal conductivity [W/(mk)]	1,24	Not Relevant
m² / Item	0,16 m²	External Fire performance	Not Relevant	Not Relevant
Average weight / Item	13 kg	Durability	Satisfactory	Satisfactory o
Average weight / Pallet	2028 kg	Reaction to fire	Classe A1	Not Relevant

Approved:	FTP nº:	Date:
Vítor Silva	RELN_003_EN	14/01/2013

A Cimenteira do Louro, S.A. | Ap. 163 E.C.Famalicão – 4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900 | www.acimenteiralouro.pt
acl@acimenteiralouro.pt