ACL ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

TRIANON 450x300x50 | 250x300x50 (MOD. 741)

units: mm

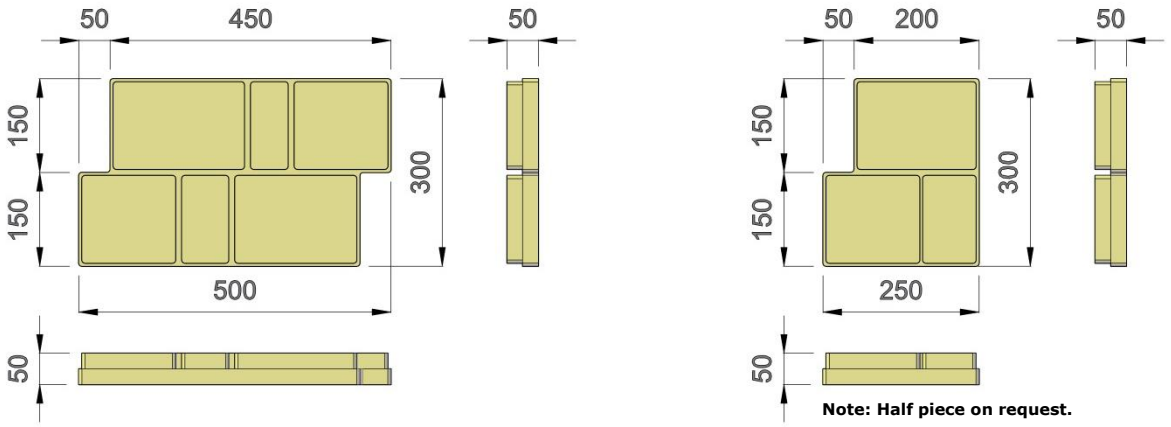

Note: Half piece on request.

Dimensions and photo of piece



Product characteristics and package		Technical Specifications		
		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Colors Available	BEIGE / ANTHRACITE	**Intended use**	**Internal Flooring**	**External Flooring**
Dimensions	450x300x50	**Emission of asbestos**	Pass	Not Relevant
Quantity per Pallet	11,88 sqm	**Breaking Strength (MPa)**	≥ 3,5	≥ 3,5
Items/sqm	7,4 units	**Slip/ Skid Resistance**	Satisfactory	Satisfactory
Items/Pallet	88 units	**Thermal Conductivity [W/(mk)]**	1,24	Not Relevant
Average weight/Item	15 kg	**External fire performance**	Not Relevant	Not Relevant
Average weight/sqm	111 kg	**Durability**	Satisfactory	Satisfactory
Average weight/Pallet	1320 kg	**Reaction to fire**	Classe A1	Not Relevant

Approved	**Elaborate**	**PTDS nº:**	**Date**
Vítor Silva	Bruno Veloso	TRIAN_001_EN	09-09-2016

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.