ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET

CE


NEW JERSEY H2 - female fitting

EN 1317–5 ; "Road restraint systems - Part 5: Product requirements and evaluation of conformity for vehicle restraint systems."


units: *mm*

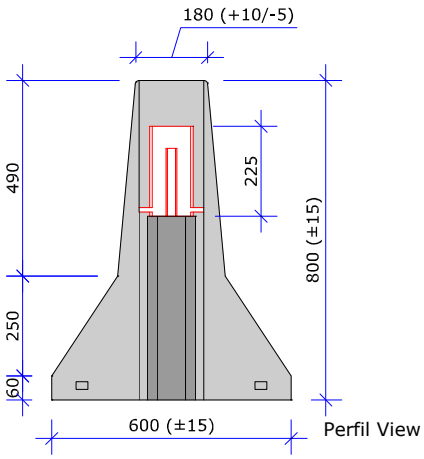


Perfil View

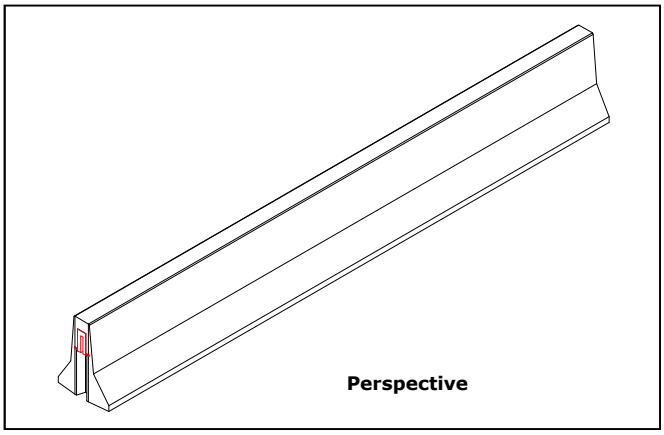

Perspective

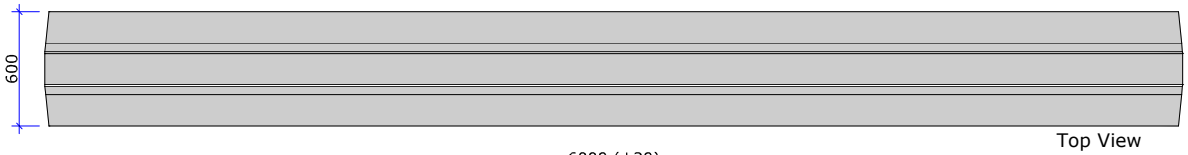

Top View

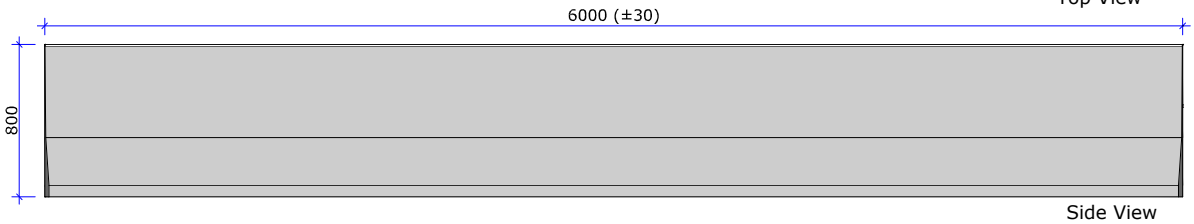


Side View

Product characteristics

EN 1317-2 and **EN 13369 ;** "Specification for concrete safety barriers"

Essential characteristics	*TB 11*	*TB 51*
Dimensions(mm)	*6000x600x800*	*6000x600x800*
Containment level	*H2*	*H2*
Impact severity	*C*	*A*
Normalized working width	*Class W3*	*Class W6*
Normalized dynamic deflection	*0,5 m*	*1,2 m*
Normalized vehicle intrusion	*--*	*Class VI5*
Concrete strength EN 206	*Class C30/37*	*Class C30/37*
Concrete exposure EN 206	*Class XC4*	*Class XC4*
Resistance to snow removal	*Class 4*	*Class 4*
Reinforced steel	*A500 NR*	*A500 NR*
Concrete cover	*40 mm*	*40 mm*
Weight	*3685 kg*	*3685 kg*

fitting system perspective

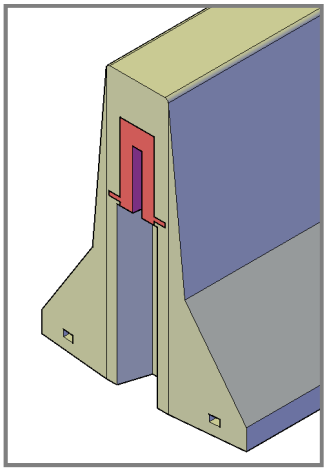

Approved by: Carlos Silva	**Elaborated by:** Eduardo Pimenta	**PTDS nº:** SNJC_002_EN	***Date:*** 20/12/2012

A Cimenteira do Louro, S.A. | Ap. 163 E.C.Famalicão – 4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900 | www.aalweb.pt
acl@aclweb.pt