




INTERLOCK UNI 220 x 110 x 100 / 220 x 110 x 80 / 220 x 110 x 60 (Length x Width x Height)


Unit: mm

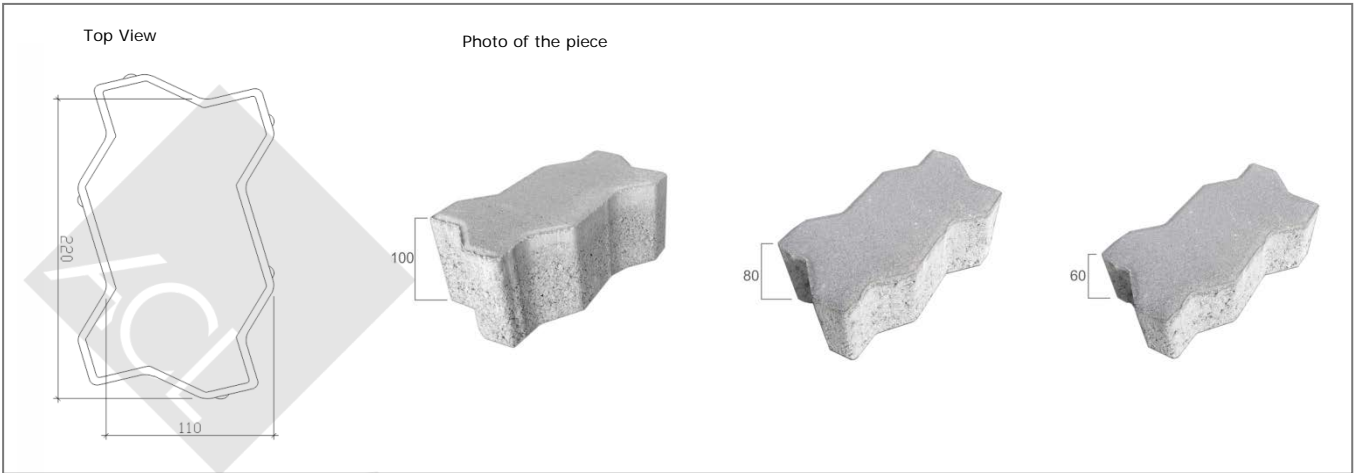

Available Colours:




Green



Yellow




Red




Brown



White




Grey




Anthracite


Application Suggestion



Type 1



Type 2



Type 3

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Product Characteristics

EN 1338 – "Concrete paving Blocks – Requirements and test methods"

Intended use	Internal Flooring	External Flooring	
Emission of asbestos	Pass	Not Relevant	
Breaking Strength (MPa)	≥ 3,6	≥ 3,6	
Slip/Skid Resistance	Satisfactory	Satisfactory	
Thermal Conductivity [W/(mk)]	1,24	Not Relevant	
External fire performance	Not Relevant	Not Relevant	
Durability	Satisfactory	Satisfactory	
Reaction to fire	Classe A1	Not Relevant	
Approved by: Carlos Silva / Dinis Silva	Elaborated by: Bruno Veloso	PTDS n°: PAV_U_002_EN	Date: 04/07/2018