
ACIMENTEIRADOLOURO

PRODUCT TECHNICAL DATA SHEET

IMITATION DECK 1000x200x30 (MOD. 579)

units: mm

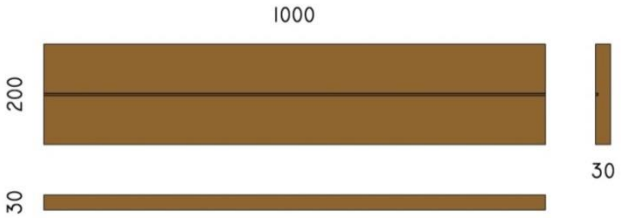

Piece Dimensions



Piece Photo



Product characteristics and package	
Colors Available	579/2, 579/4, 579/6, 579/7, 579/8
Dimensions	1000x200x30
Quantity per Pallet	11,60 sqm
Items/sqm	5 units
Items/Pallet	58 units
Average weight/Item	13,8 kg
Average weight/sqm	69 kg
Average weight/Pallet	806 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved	**Elaborate**	**PTDS nº:**	**Date**
Vítor Silva	Bruno Veloso	DECK_002_EN	21/01/2020

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.