ACIMENTEIRADOLOURO


Technical Data Sheet

Marmobrick Classic





Product dimensions

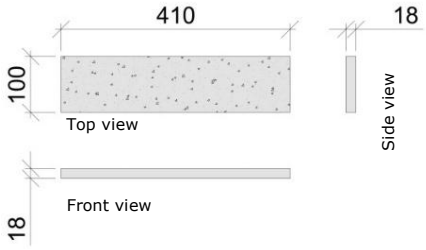

Dimensions (mm)

Available Colors



Finishes



N natural — R10

M honed

A slip-resistant — R13

GR bush-hammered — R13

S polished

Product characteristics

Dimensions	**100x401x18 mm**
Quantity per Pallet	35,42 sqm
Quantity per Box	0,492 sqm
Items/sqm	24,4 units
Items/Box	12 units
Boxes/Pallet	72 units
Average weight/sqm	± 36,6 kg
Average weight/Box	± 19 kg
Average weight/Pallet	± 1320 Kg

***Includes recycled material (glass)**

Due to the characteristics of natural stone aggregates and their photographic reproduction, slight variations in grain size and colour tone may occur.

Technical Specifications

Product Classification	EN 14618	Concrete Coating
Surface Quality	EN 14617-16	Visual Inspection
Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Maximum Water Absorption	EN 14617-1	≤ 6 %
Average Apparent Density	EN 14617-1	2200 ±50 kg/m³
Freeze/Thaw Resistance **Flexural Strength** (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Thermal Shock Resistance **Flexural Strength** (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Minimum Flexural Strength	EN 14617-2	7 MPa
Compressive Strength Class **Minimum Compressive Strength**	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm²
Water Absorption by Capillary	EN 772-11	≤ 1 g/(m².s)

Approved	**Elaborate**	**Ref.ª FTP**	**Date**
Vítor Silva	Joana Ferreira	MBC_001_EN	28/05/2026