ACIMENTEIRADOLOURO

Technical Data Sheet

Concrestrip

MOD. 940





Product dimensions

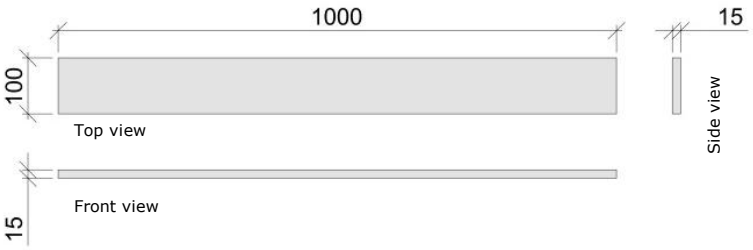

Dimensions (mm)

Available Colors



CS 28 N



CS 28 GR



CS 29 N



CS 29 GR



*** Natural Finish exhibits surface variations both within each individual piece and between different pieces. No two pieces with a natural finish are identical, nor are they identical to the sample. The concrete surface may also present small voids caused by air bubbles. These are natural characteristics of concrete.**

Product characteristics

Dimensions	**100x1000x15 mm**
Quantity per Pallet	29,40 sqm
Quantity per Box	0,7 sqm
Items/sqm	10 units
Items/Box	7 units
Boxes/Pallet	42 units
Average weight/sqm	± 34,30 kg
Average weight/Box	± 24 kg
Average weight/Pallet	± 1030 kg

Technical Specifications

Product Classification	EN 14618	Concrete Coating
Surface Quality	EN 14617-16	Visual Inspection
Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Maximum Water Absorption	EN 14617-1	≤ 8 %
Average Apparent Density	EN 14617-1	2200 ±50 kg/m³
Freeze/Thaw Resistance **Flexural Strength** (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Thermal Shock Resistance **Flexural Strength** (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Minimum Flexural Strength	EN 14617-2	7 MPa
Compressive Strength Class **Minimum Compressive Strength**	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm²
Water Absorption by Capillary	EN 772-11	≤ 1 g/(m².s)

Approved	**Elaborate**	**Ref.ª FTP**	**Date**
Vítor Silva	Joana Ferreira	CS_001_EN	28/05/2026