ACIMENTEIRADOLOURO


PRODUCT TECHNICAL DATA SHEET

CE

RELEVO MADEIRA 500x500x30/45 (MOD. 74)

units: mm

Piece Dimensions

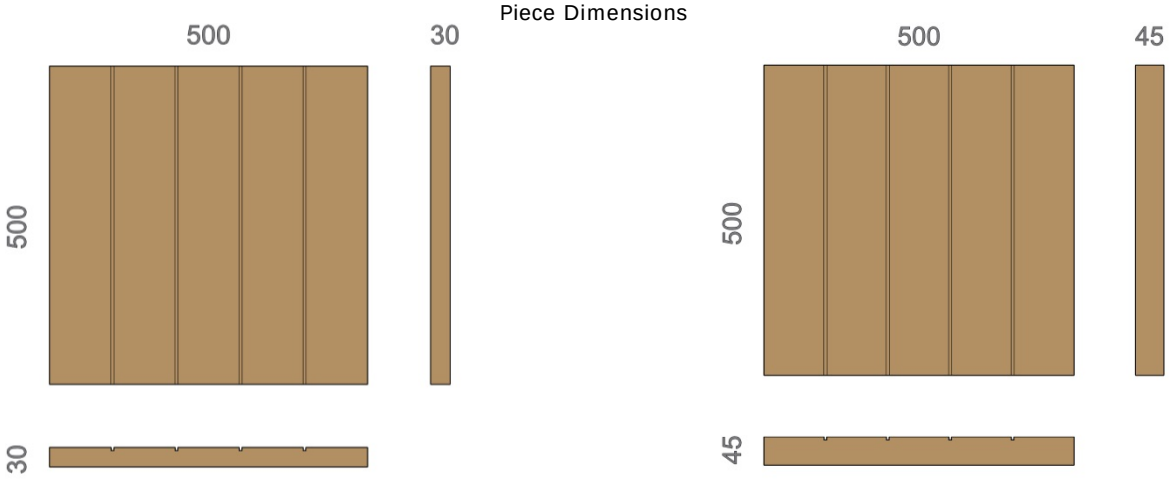

Dimensional Tolerances: Length ± 5 mm // Width ± 5 mm // Thickness ± 3 mm


MADEIRA M74/7

Product characteristics and package

Colors Available 74/2 74/4 74/6 74/7 74/8

Dimensions length x width x thickness	500x500x30	500x500x45
Quantity per Pallet	18 sqm	13 sqm
Items/sqm	4 units	4 units
Items/Pallet	72 units	52 units
Average weight/Item	16,25 kg	25 kg
Average weight/sqm	65 kg	100 kg
Average weight/Pallet	1170 kg	1300 kg

Technical Specifications

EN 1339 – "Concrete paving flags – Requirements and test methods"

Intended use	**Internal Flooring**	**External Flooring**
Emission of asbestos	Pass	Not Relevant
Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Slip/ Skid Resistance	Satisfactory	Satisfactory
Thermal Conductivity [W/(mk)]	1,24	Not Relevant
External fire performance	Not Relevant	Not Relevant
Durability	Satisfactory	Satisfactory
Reaction to fire	Classe A1	Not Relevant

Approved Vítor Silva	**Elaborate** Bruno Veloso	**PTDS nº:** RMAD_001_EN	**Date** 07/10/2020

A Cimenteira do Louro, S.A. | Ap. 163 E.C. Famalicão
4761-926 V.N. Famalicão, Portugal | Tel. (+351) 252 301 900
www.aclweb.pt
acl@aclweb.pt

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.